



PCI/CH 2004/000599



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 27 SEP 2004	
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Andrew Gervay

Dated 27 July 2004

26 SEP 2003

NEWPORT



1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

30088GB

26SEP03 E840220-1 D10149

2. Patent application number

(The Patent Office will fill in this part)

0322566.1

PG1/7700 0.00-0322566.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Givaudan SA
Chemin de la Parfumerie 5
1214 Vernier
Switzerland

Patents ADP Number (if you know it)

840803/001

If the applicant is a corporate body, give the country/state of its incorporation

Switzerland

4. Title of the Invention

DEVICE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Centre for Innovative Technology (Givaudan UK Ltd.)
76-80 Church Street, Staines
Middlesex TW18 4XR
United Kingdom

Patents ADP number (if you know it)

84478/5001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:)

yes

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d)

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 7 ✓

Claim(s) 1 ✓

Abstract 1 ✓

Drawing(s) 5+5 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*) 1 ✓

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 24/09/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Colin Brown (office time) Tel. No: 01/784417721

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' *Patents Form 7/77* will need to be filed
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office

DEVICE

This invention relates to a device for disseminating vaporous material in an enclosed atmosphere by means of forced ventilation.

5

Devices for disseminating vaporous materials in an enclosed atmosphere, such as a room or hall, are very well known, and many varieties are available. The vaporous material is generally provided in the form of a volatile liquid comprising a substance whose presence in the atmosphere is desired, for example, a fragrance or an insecticide. Most of the known
10 devices for home and non-institutional use are simple and inexpensive, which has led to their wide acceptance. A high proportion of these work by evaporation alone, typically from a cylindrical porous wick that extends from the liquid in a reservoir to the atmosphere. This is often not sufficient, and assistance with evaporation has been introduced. This has typically taken the form of some type of heating element used in conjunction with an evaporating
15 element. Such a device can work well, but it has its drawbacks.

Forced ventilation by means of some sort of artificially-created air current has long been an attractive idea, but until very recently expense has limited its use to large installations; it has been prohibitively expensive for small devices of the type used in homes and other relatively
20 small enclosed atmospheres. This situation has changed with the widespread availability of small electric cooling fans, designed initially for the computer industry. This has made possible the production of cheap, fan-driven (battery or mains) devices for the dissemination of vaporous materials, and commercial examples have started to appear. Present designs feature the use of such fans with conventional cylindrical wicks, which protrude into the air
25 stream created by the fan.

It has now been found that such devices can be substantially improved in performance while keeping the prices down. The invention therefore provides a device adapted to disseminate vaporous material into an atmosphere by means of forced ventilation acting on an evaporation
30 surface supplied with a liquid volatile material that is vaporised thereby, the evaporation surface being essentially planar and having an orientation generally parallel to the direction of the forced ventilation.

By "forced ventilation" is meant any form of ventilation in which a flow of ventilating gas is artificially caused to flow in a desired direction. This can be achieved by any convenient means, such as the release of a gas from a pressurised cylinder. However, for the purposes of
5 this invention, it is preferred that the gas be atmospheric air (with relation to the flowing gas, the word "air" will be used exclusively from now on, but it should be remembered that this is considered to encompass other gases). It may be caused to flow by any convenient means, for example, a bellows, but it is preferred that the flow be continuous and substantially uniform. This can be achieved by simple devices such as impellers or fans. These may be driven by any
10 convenient means of motivation, but it is preferred that the means be electricity, provided by, for example, mains electricity, solar cells and batteries. The nature and desired location of the device will determine which type of electrical generation will be most appropriate (for example, batteries for a device that is required to operate in locations where mains electricity is not easily available). If mains electricity is to be used, the device may be provided with a
15 power cable and plug, or a plug built into the structure of the device, so that it can be directly plugged into a power point. Such a device will also need a transformer, but this is well within the skill of the art.

The significant difference between the present invention and the devices known to the art is
20 that the evaporation surface is essentially planar. In other words, it is not a three-dimensional solid, like a conventional cylindrical wick protruding into the flow of forced ventilation, but a substantial surface across which the air flows. This does not mean that some element of the evaporation surface cannot protrude into the air flow (this aspect will be further discussed hereinunder), but that the basic evaporation surface is planar and lies in a plane generally
25 parallel to the direction of air flow. The surface can be in any orientation around the axis of air flow, but it is preferred for practical reasons that it be generally horizontal and located beneath the flow. This allows for ease of operation and replacement of components and replenishment of liquid.

30 In its simplest form, the evaporation surface is completely flat and is positioned such that the air flow of the forced ventilation blows across this surface in a direction parallel to the plane of the surface. The surface is preferably appreciably larger than the surface area of the typical

cylindrical wick that is impinged upon by the air flow in a known device. In a typical household application, the diameter will be typically of the order of 3-4 cm, as opposed to the wick diameter typically of about 0.5-1.5 cm. (these measurements are given by way of illustration and are not to be regarded as being in any way limiting). Because of its simplicity and cheapness, this embodiment is one of the most preferred embodiments. Thus, in a typical device for domestic use, the evaporative surface may be an insert in the neck of a reservoir of volatile liquid, and the liquid may be brought to the evaporative surface by any convenient means, for example, an attached wick extending downwardly into the liquid. Such reservoirs can be made available as separate units, able to be fitted to a standard forced ventilation unit equipped with a suitable attachment means, for example, a neck bearing an external screw thread that cooperates with a screw thread in the ventilation unit, the screwing in of the reservoir bringing the evaporation surface in the neck into the appropriate evaporative relationship with the air flow. There are many other possibilities, such a variety of snap fittings, but the nature of the attachment means is not narrowly critical and the skilled person will readily be able to envisage a wide range of possibilities, all within the scope of the invention.

It is also possible that the evaporation surface may not be completely flat. For example, it may comprise undulations of any desired form, for example, concave "wave"-type ridges, or the opposite, convex "bump"-type ridges. The form is not critical. These have the effect of increasing the surface area, and they may protrude into the air flow.

In a particularly preferred embodiment, there is raised on, and essentially perpendicular to, the evaporative surface at least one flat vane, which extends across the surface in the direction of the air flow. Although "vane" is used in the singular here, there may be more than one, and the use of the singular also includes the plural; indeed, there is preferably a series of such vanes, arranged parallel to each other. The vane may extend completely across the surface, or it may be made up of a series of short vanes extending along a common axis parallel to the direction of air flow. The height to which the vane extends from the surface is not narrowly critical, and suitable dimensions can be decided by the skilled person. The vane may protrude into or through the air flow to any desired degree. The vane may be fitted to an evaporative surface, or it may be integral therewith.

Evaporative surfaces may be made from any suitable material, and the skilled person may easily select such a material. The surface, the means of transporting the liquid from the reservoir to the surface and, where present, the vane, may be made as different components from different materials and assembled. Alternatively, depending on the desired materials, two or more of these components may be integral. For example, the surface and the vane may be machined or moulded from a single material, with the transporting means (for example, a wick) being made separately. It is possible to make all three in one piece. Typical materials for use in such surfaces, vanes or wicks are porous plastics and ceramic materials .

10 A particularly preferred embodiment of the invention comprises the following elements:

- (a) an electrically-driven fan, fitted with a housing that is constructed so that it blows a current of air horizontally through an exit port into an atmosphere;
- (b) a reservoir of volatile liquid for evaporation into the atmosphere, the reservoir having an upper orifice substantially completely blocked by an evaporation surface, reservoir and housing cooperating such that the current of air blows across the evaporation surface as it moves towards the exit port; and
- (c) means of transferring liquid from the reservoir to the evaporative surface.

20 By "substantially completely blocked" is meant that the evaporative surface blocks the upper orifice to a sufficient extent such that the liquid will not flow out to any great extent if the reservoir is knocked over, but that there will be provision for pressure to be equalised between the atmosphere and the interior of the reservoir. (If there is no such provision, evaporation can cause a partial vacuum, which will stop the device from working). Suitable air access may be provided by any convenient means, for example, choice of material or the provision of a suitable small vent.

The devices according to the invention are cheap and easy to manufacture and use. A typical device will have an integral electrical plug and can simply be plugged into a power point and left to operate. They also perform much better than do the known devices. In addition, where replaceable reservoirs of volatile liquid are to be used, these are more easily sealed than those currently used, resulting in less wastage.

The invention shall now be further described with reference to the accompanying drawings, which depicts a preferred embodiment particularly adapted for the dissemination of fragrance, and which are not intended to be in any way limiting.

5

Figure 1 is a perspective drawing of an embodiment of the invention, showing the general configuration.

Figure 2 is a diagrammatic part-cutaway drawing of the embodiment of Figure 1, showing the
10 positioning of the important elements of the embodiment.

Figure 3 is a diagrammatic vertical cross-section through the embodiment of Figure 1.

Figure 4 depicts diagrammatically some possibilities of auxiliary evaporation surfaces.

15 Figure 5 depicts diagrammatically a further embodiment that makes use of auxiliary evaporation surfaces.

It will be understood that the shape of the device depicted in the figures is largely a matter of aesthetics and that many other shapes are possible. Moreover, it will also be understood that,
20 using the ordinary skill of the art, the internal arrangement and features may be varied considerably from those shown, without departing from the concept of the invention.

The device comprises an outer housing 1 made of plastics or other suitable material. This housing comprises a row of slots 2 for the dissemination of fragrance into the atmosphere. At
25 the rear of the housing are located the prongs of a electrical plug 3, permitting the plugging of the device into a mains power supply.

Located within the housing is a fragrance reservoir 4, this being held in place by means of a screw thread 5 on the neck of the reservoir, which cooperates with a screw thread on the
30 inside of the housing. The neck of the reservoir is wide and is closed by a large evaporating surface 6. This is attached in turn to a porous wick 7, which extends downwards into the reservoir 4 and brings liquid to the evaporating surface 6.

A stream of air is caused to flow across the evaporating surface 6 in the direction of the slots 2 by means of fan 8. The fan is of the type used in laptop computers and is electrically powered by current drawn from a power point by means of the plug 3, the mains voltage being converted to an appropriate voltage for the fan by a transformer 9 mounted above the fan. Thus, the act of plugging the device into a power point starts the operation of the fan.

The reservoir 4 is designed for easy removal and replacement. Thus, an exhausted reservoir is readily replaced by simply unscrewing the exhausted one and replacing it with a full one.

10

In Figure 4, there may be seen some non-limiting possibilities of auxiliary evaporation surfaces. The embodiments Fig. 4A and Fig. 4B depict basically the same embodiment, the difference being that, in Fig. 4A, the wick 7 is moulded in a single piece with the planar evaporation surface 6, whereas in Fig. 4B, it is a separate component. The latter arrangement is more convenient to manufacture. However, the two embodiments function in exactly the same way. The same is true of Fig. 4C and 4D.

In Fig. 4A-4B, there is raised on the planar surface 6 a series of parallel rows of vanes 10, extending substantially perpendicularly from the planar surface. These vanes are arranged such that they are parallel to the direction of a flow of forced ventilation. They raise substantially the surface area available for evaporation.

In Fig. 4C-4D, the vanes are broken into series of individual blocks 11. These provide even more surface area and evaporative potential.

25

In Fig. 5A, the planar surface 6 has a configuration similar to those of Fig. 3A, except for the presence at one side of the parallel row of vanes 10 of a substantially taller vane 12, this extending away from the surface 6 to a distance as great as the diameter of a ventilation fan 8 placed so as to blow air across the planar surface. In this case, the planar surface is rotatable in the plane of the surface.

30

When the vanes are orientated such that they are parallel to the ventilation flow, the device works as previously described. However, when the surface is turned, the taller vane 12 moves in front of the fan 8, preventing its flow from blowing across the planar surface 6. This reduces considerably the amount of fragrance disseminated into the atmosphere, and it thus
5 allows fragrance output to be reduced, without unplugging the device.

CLAIMS:

1. A device adapted to disseminate vaporous material into an atmosphere by means of forced ventilation acting on an evaporation surface supplied with a liquid volatile material that is vaporised thereby, the evaporation surface being essentially planar and having an orientation generally parallel to the direction of the forced ventilation.
2. A device according to claim 1, in which the planar surface is generally horizontal and located beneath the flow of the forced ventilation.
3. A device according to claim 1 or claim 2, in which there is raised on the planar surface at least one flat vane, which is essentially perpendicular to the surface and which extends across the surface in the direction of the air flow.

ABSTRACT

A device adapted to disseminate vaporous material, such as a fragrance, into an atmosphere by means of forced ventilation acting on an evaporation surface supplied with a liquid volatile material that is vaporised thereby, the evaporation surface being essentially planar and having an orientation generally parallel to the direction of the forced ventilation. The ventilation is preferably supplied by an electrically-powered fan.

Fig. 1

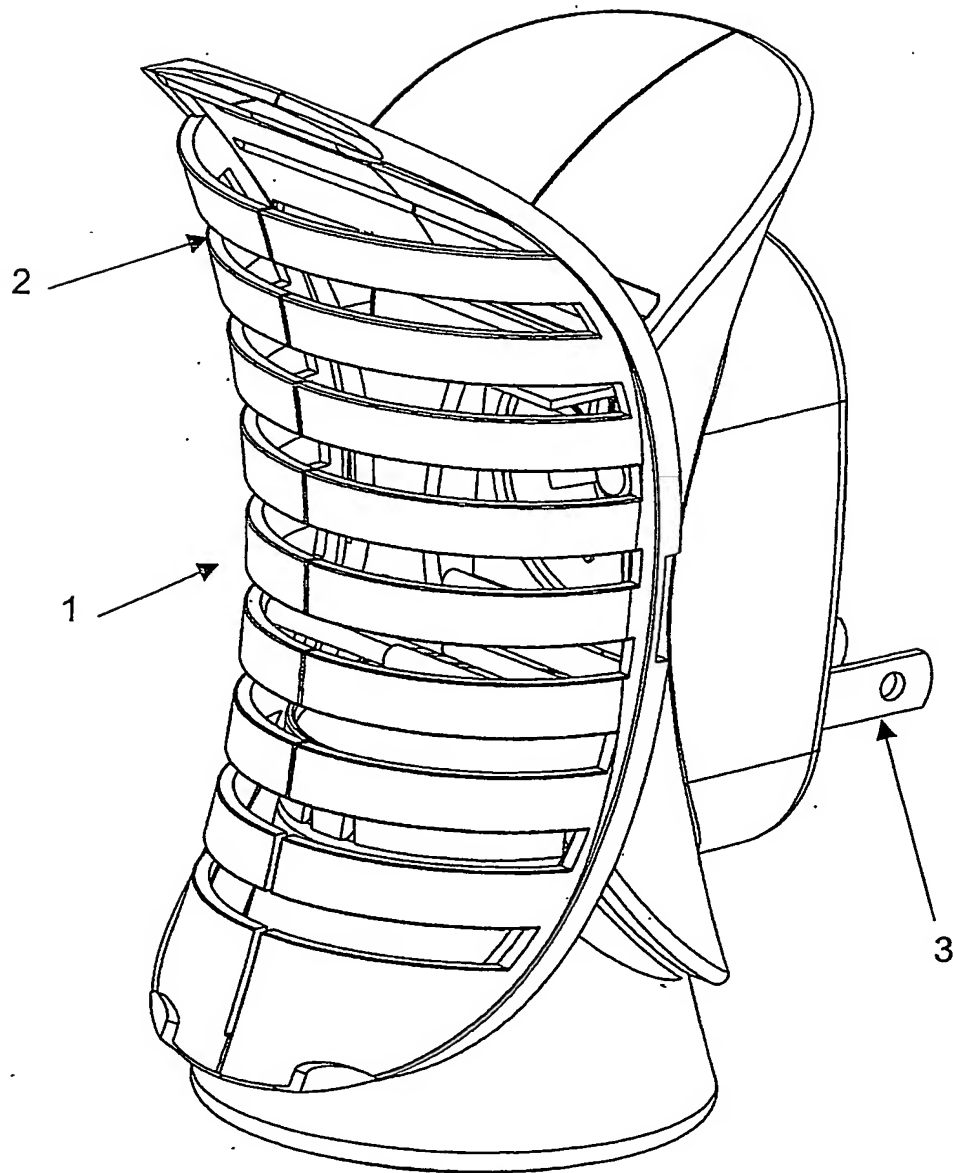


Fig. 2

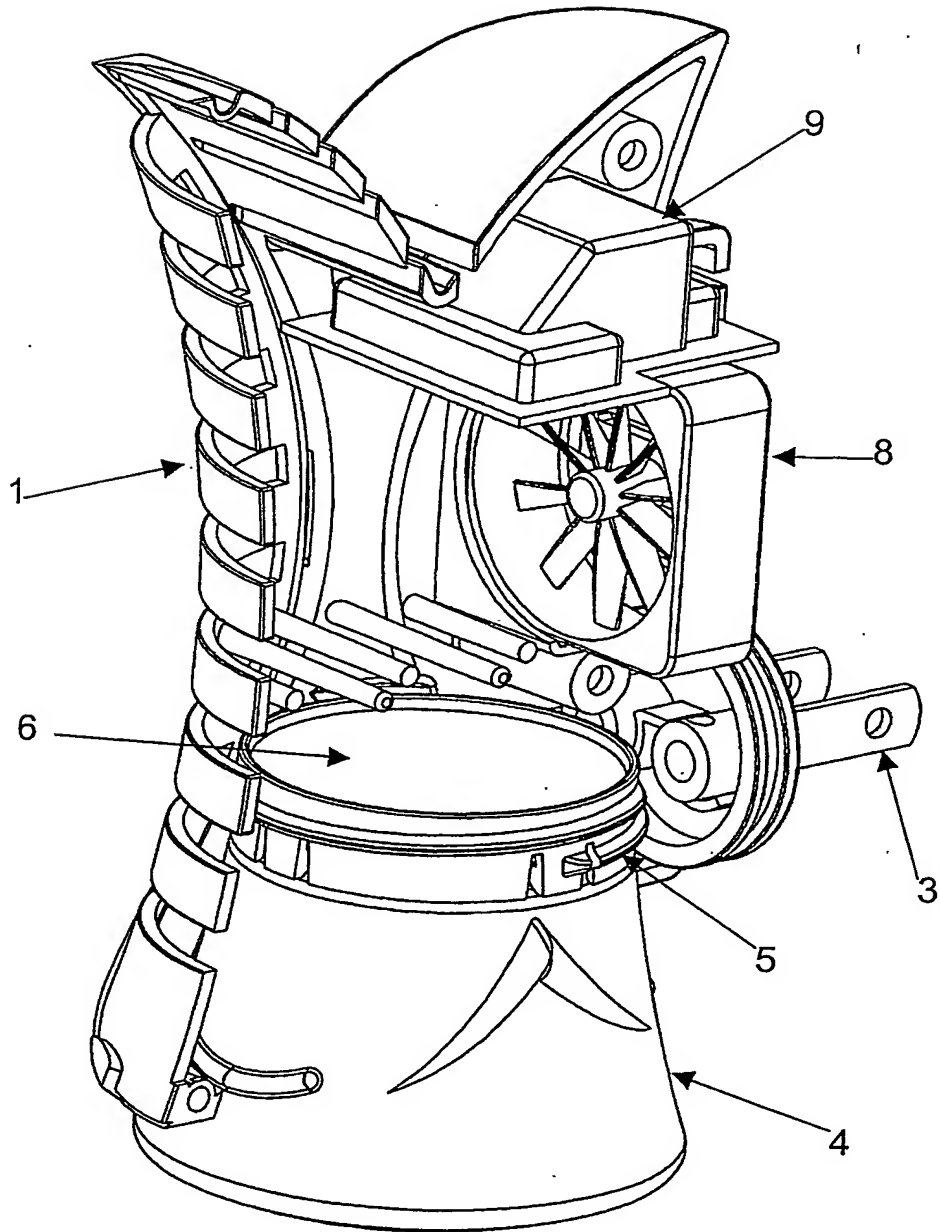


Fig. 3

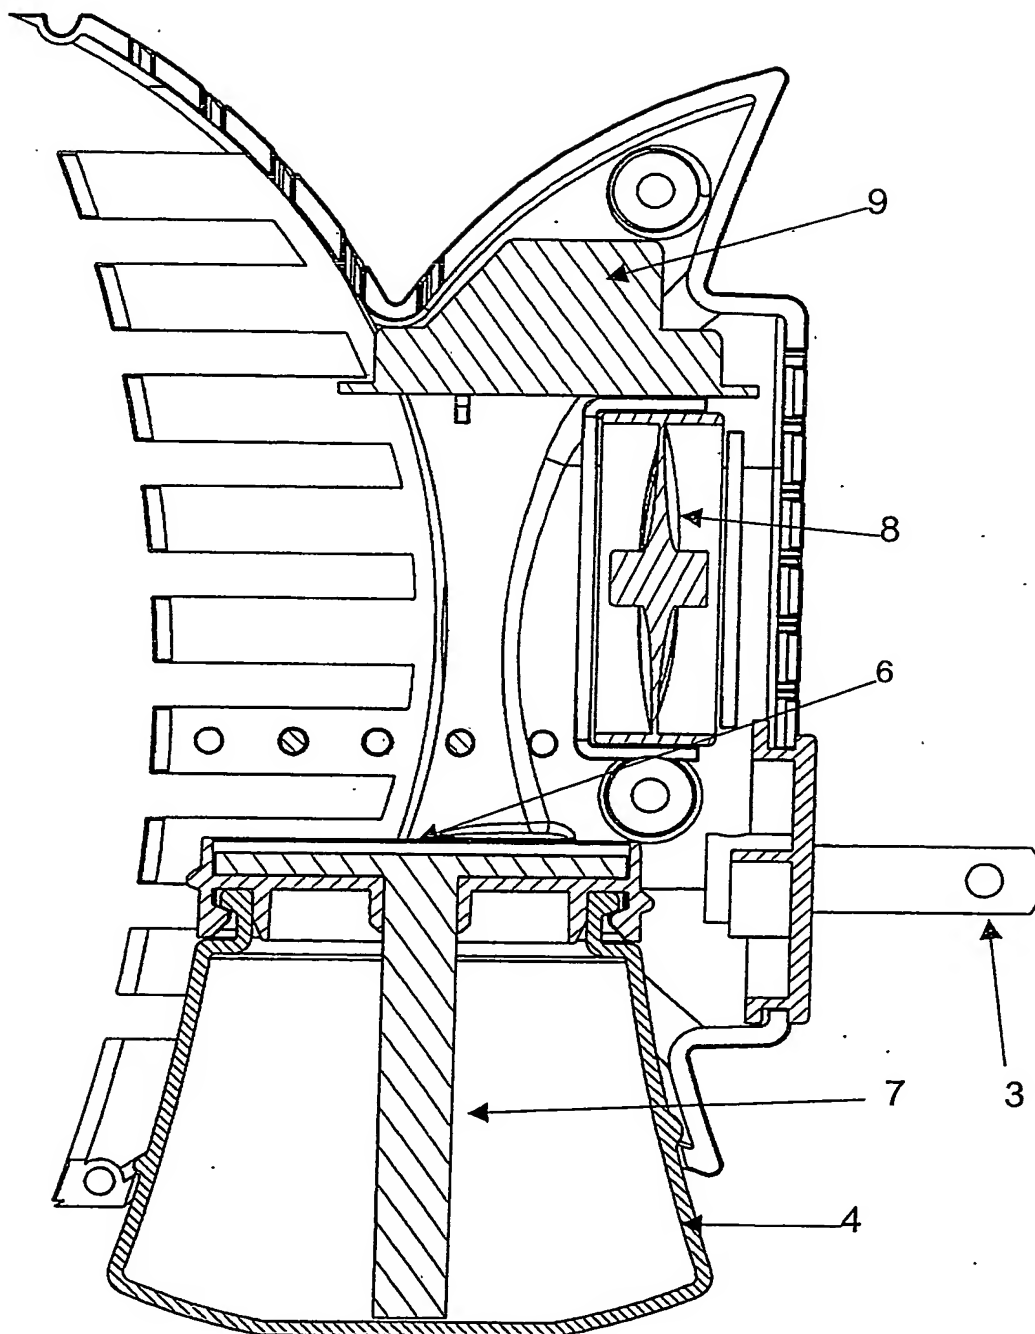


Fig. 4A

Fig. 4B

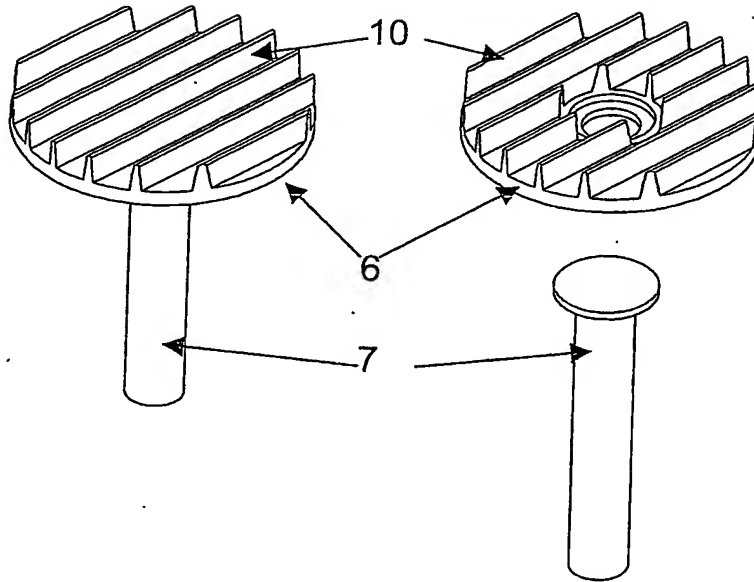


Fig. 4C

Fig. 4D

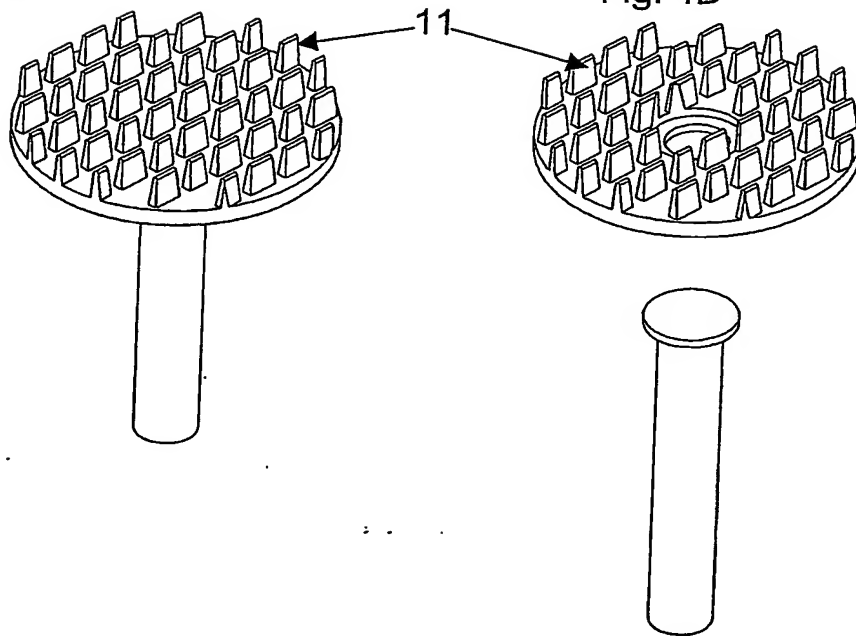


Fig. 5A

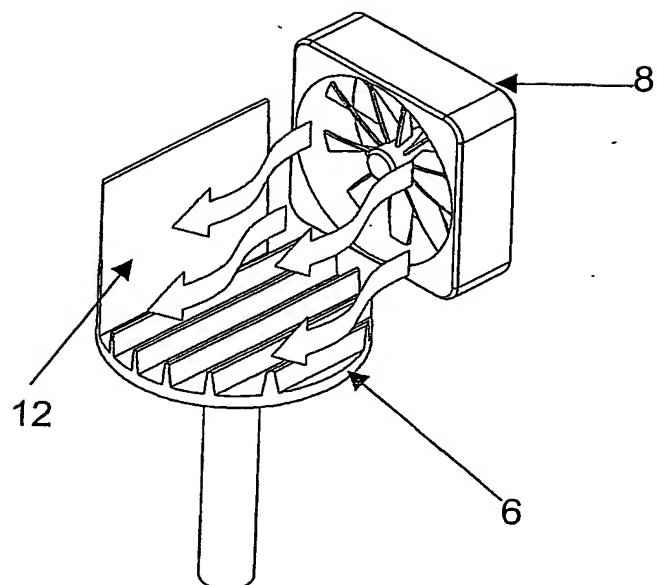


Fig. 5B

